

HIPPO SAFETY FENCE®












THE FENCE RECOMMENDED BY

KARIN DONCKERS OLYMPIC RIDER

www.hipposafetyfence.com

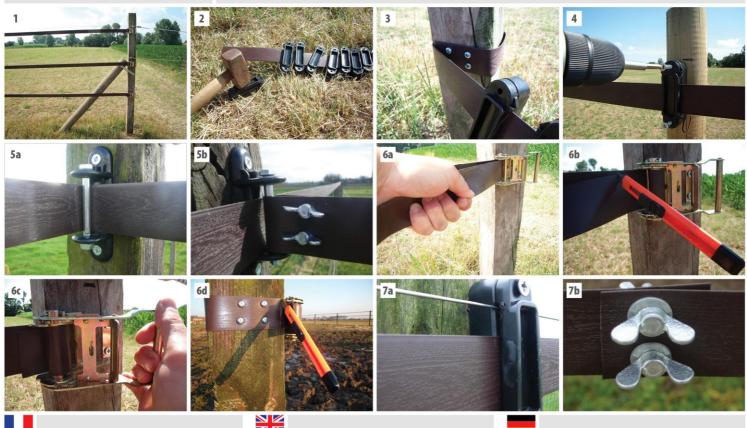

- 1. Make sure that the first, last and corner posts are firmly set and cannot move. Do not exceed 3 meters between the posts..
- 2. Close the holders with a hammer and slide them over the tape (picture 2).
- 3. Fix the tape to the first post with 4 screws (use washers) and wrap the tape once or twice around the post. Should you need to make a repair (picture 7b), simply unwind the excess tape, join the two ends and secure with the tape connector.
- 4. Unravel the tape and screw the holders on at the desired height. Use screws 60X6mm.
- 5. In the corners use the corner holder. This holder is also used for making divisions (5b).
- 6. At the end of the 100m tape, screw in the ratchet to the tension post. Use a ratchet at maximum 100m. Put the tape in the ratchet and pull by hand (6a). A 100 meter roll will extend by appx. 1 meter. Then tension two times and cut the tape (6b). Tension a few more times with the ratchet (6c). When erected during colder days, it might be necessary to further tension the tape again on the first sunny day. There is also an option to use just 1 ratchet to tension all the tapes. In this situation you put the ratchet on the backside of the post (6d).
- 7. In the groves, top and bottom, of the holder you have the choice to put a galvanized electric wire (7a) or a thin electric cord (this last option is very safe as it breaks easily). The Hippo Safety Fence tape has a breaking point of +-300kg. Very quick reparation when tape is broken (7b).